

A high-performance photovoltaic panel
ideal for any type of PV installation

✓ **Finest esthetics and easy installation**

Elegant and attractive design
Portrait and landscape installation
Mechanical load up to 5,400 Pa
Compatible with all roof mounting systems

✓ **Optimized for performance**


72 High-efficiency PERC monocrystalline cells
Positive classification -0/+5 Wc
Antireflective glass ensures high yields even at diffuse irradiation

✓ **Highest quality standards**

DIN EN ISO 9001:2015 certified factory
Certification according to IEC, CSA and CEC standards*
Salt mist corrosion testing according to IEC standards

✓ **Warranty**

25 years linear power warranty
25 years product and labour costs warranty**
French manufacturer

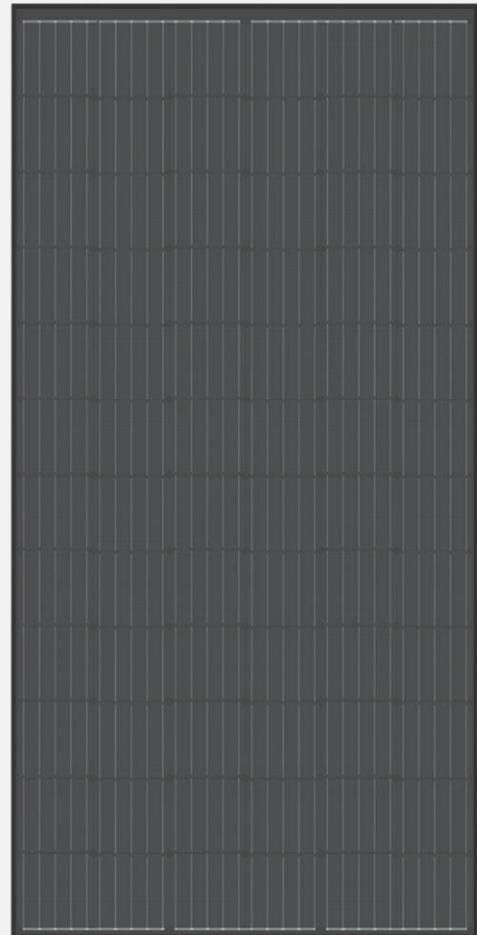

*IEC 61215 & 61730 n°Z2 103216 0004 Rev. 00 / UL61730 n°80035968
** Please refer to DualSun Premium Warranty Terms



TECHNICAL DATA

PHYSICAL DATA

Length	1980 mm
Width	1002 mm
Frame width	40 mm
Weight	22 kg
Number of cells	72
Cell type	PERC Monocrystalline
Connectors	MC4 / MC4 compatible
Junction box	IP67 - 3 diodes
Maximum load	5400 Pa (snow) / 2400 Pa (wind)
Frame colour	Black anodised aluminium / Black

OPERATIONAL CHARACTERISTICS

Temperature	-40°C to +85°C
Maximum system voltage	1000 VDC
Reverse current load	20 A
NOCT	45 ± 2°C
Application class	Class II

PHOTOVOLTAIC CHARACTERISTICS


STC Conditions (AM 1,5 - 1000 W/m² - 25°C)

Nominal power (P _{mpp} / W)	375
Power output tolerance	0 / +5W
Module efficiency (%)	18,90
Rated voltage (V _{mpp} / V)	39,60
Rated current (I _{mpp} / A)	9,47
Open circuit voltage (V _{oc} / V)	48,20
Short circuit current (I _{sc} / A)	9,92

Power measurement tolerance : +/- 3%

TEMPERATURE COEFFICIENTS

Voltage temperature coefficient (μV _{oc})	-0,290 %/°C
Current temperature coefficient (μI _{sc})	0,052 %/°C
Power temperature coefficient (μP _{mpp})	-0,380 %/°C

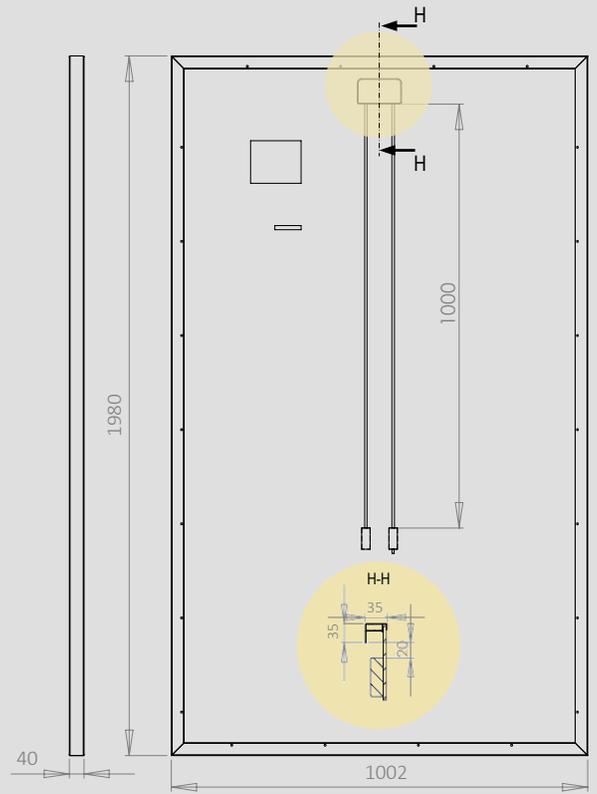

List of Flash compatible mounting systems available on DualSun website - Professional Area

